
Datasheet

P/N: GAU12V-185FFG3PF-XXX

1.85mm Female to G3PO(SMPS) Female Cable Assembly | .047” U12 Series Low Loss Phase Stable Flexible Coax Cable | DC - 67GHz



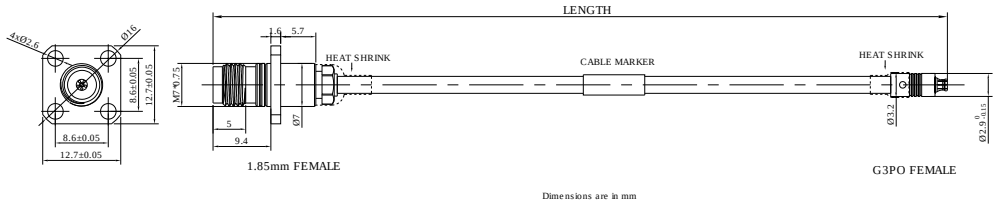


Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	U12-110G Series
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	ePTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Braid
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	1.85
Cable Color	Gray
Minimum Bend Radius (mm)	10
Capacitance (pF/m)	86
Velocity of Propagation	80%
Shielding Effectiveness	> 90dB @ 1GHz
Middle layer	ePTFE

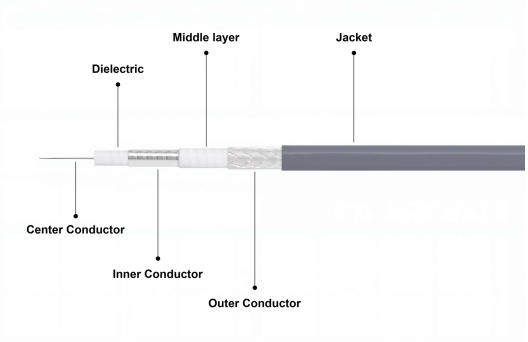

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GAU12V-185FFG3PF-XXX

1.85mm Female to G3PO(SMPS) Female Cable Assembly | .047” U12 Series Low Loss Phase Stable Flexible Coax Cable | DC - 67GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss
100	±3	DC - 67GHz	10dB to 67GHz
150	±3		
200	±3		
250	±3		
300	±5		
400	±5		
500	±5		
800	±10		
1000	±10		

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC