

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC - 67GHz	10dB to 67GHz	1.42 to 67GHz
200	± 3			2.01 to 67GHz
300	± 5			2.7 to 67GHz
500	± 5			3.78 to 67GHz
800	± 10			5.60 to 67GHz
1000	± 10			6.76 to 67GHz
1500	± 15			9.73 to 67GHz
2000	± 20			12.5 to 67GHz

Environmental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-55 °C to +125 °C

Test Report for Cable assembly

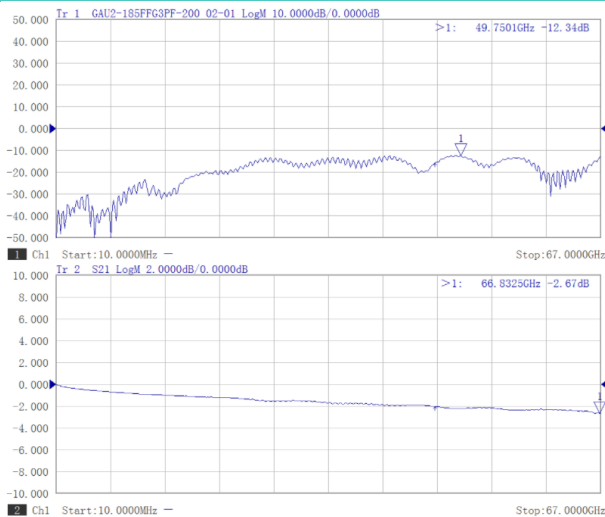

*Note: Test Cable Assembly Length = 200 mm

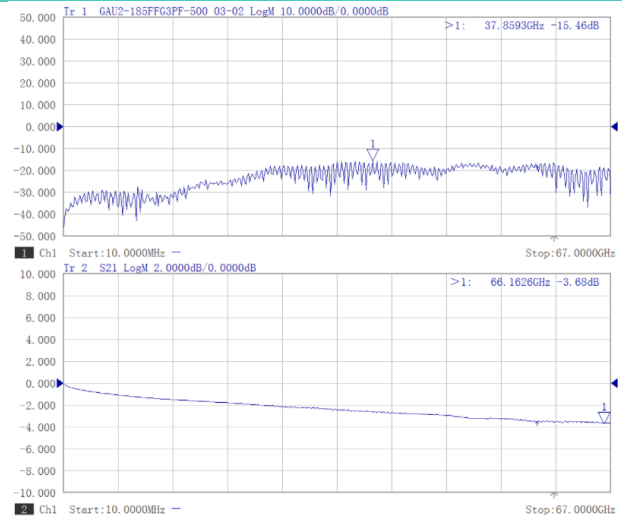

*Note: Test Cable Assembly Length = 500 mm

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01