


P/N: GAU2-185M185F-XXXA3

1.85mm Male to 1.85mm Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | With Armor |DC - 67GHz



Dimensions are in mm

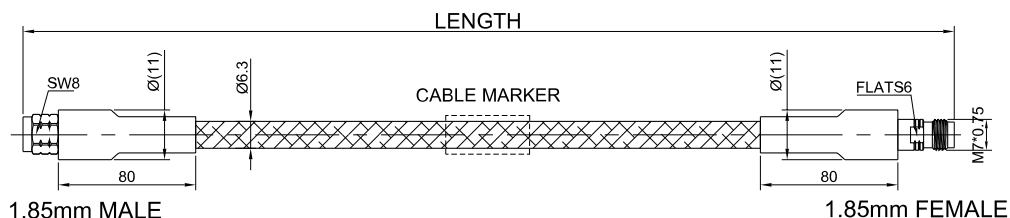

Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	1.85mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Type	GT3506 flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	LD-PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.2
Cable Color	Gray
Minimum Bend Radius (mm)	25.4
Capacitance (pF/m)	94
Velocity of Propagation	82%
Shielding Effectiveness	< -100dB @ 1GHz
Armor Type	Stainless Steel Wire Covered By Tin Plated Copper Wire And Nomex Braid
Armored Diameter (mm)	6.3mm



P/N: GAU2-185M185F-XXXA3

1.85mm Male to 1.85mm Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | With Armor |DC - 67GHz

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 67GHz	1.35	1.61
200	±3			1.90
300	±5			2.95
400	±5			2.85
500	±5			3.78
800	±10			5.80
1000	±10			6.59
1500	±15			9.4
2000	±20			12.21

Enviromental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-55 °C to +125 °C

Test Report for Cable assembly

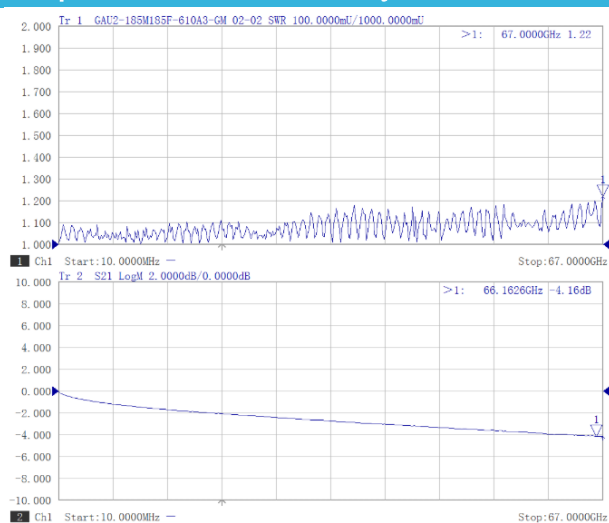

*Note: Test Cable Assembly Length = 610 mm

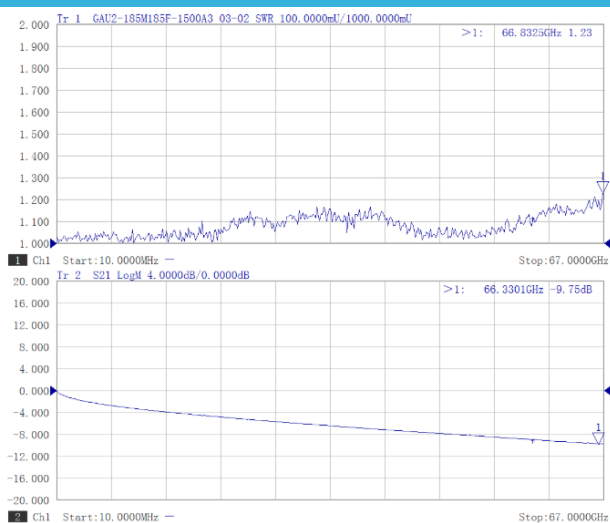

*Note: Test Cable Assembly Length = 1500 mm