
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAU2-185M185WM-XXX

1.85mm Male to 1.85mm Right Angle Male Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 67GHz



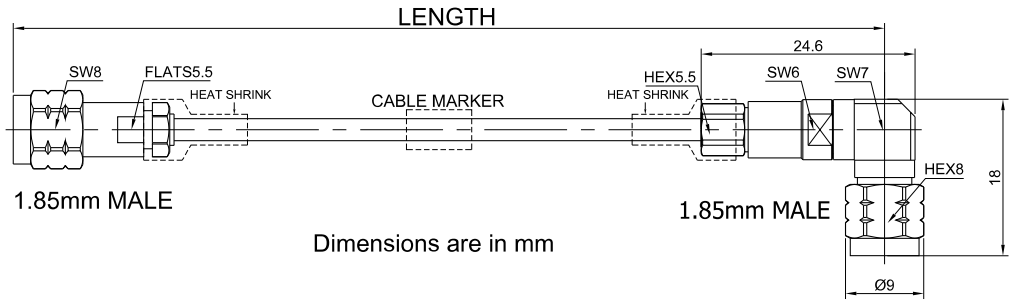


Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	1.85mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Right Angle
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Type	GT3506 flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	LD-PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.2
Cable Color	Gray
Minimum Bend Radius (mm)	11
Capacitance (pF/m)	94
Velocity of Propagation	82%
Shielding Effectiveness	< -100dB @ 1GHz

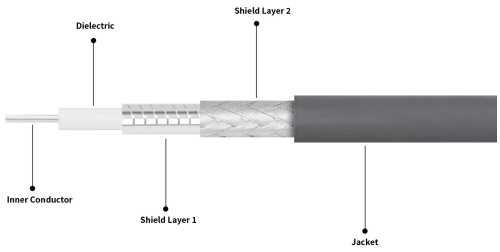

Gwave Technology Inc

(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAU2-185M185WM-XXX

1.85mm Male to 1.85mm Right Angle Male Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 67GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 67GHz	1.35	1.61
200	±3			1.90
300	±5			2.95
400	±5			2.85
500	±5			3.78
800	±10			5.80
1000	±10			6.59
1500	±15			9.4
2000	±20			12.21


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Test Report for Cable assembly

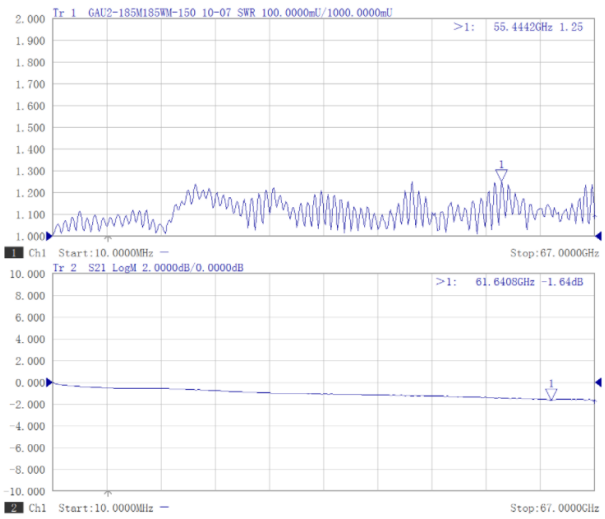

*Note:Test Cable Assembly Length = 150 mm

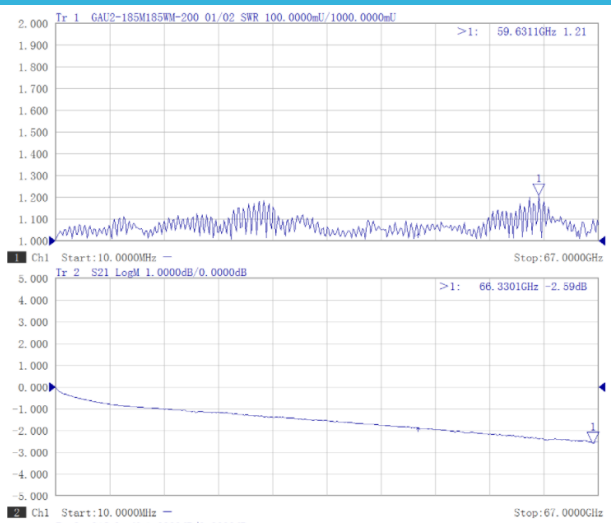

*Note:Test Cable Assembly Length = 200 mm