


1.85mm Right Angle Male to GPPO Female Cable Using 3506 Series Low Loss Phase Stable Flexible Coax, DC-65GHz P/N: [FRU2-185WMGPPF-XXX](#)

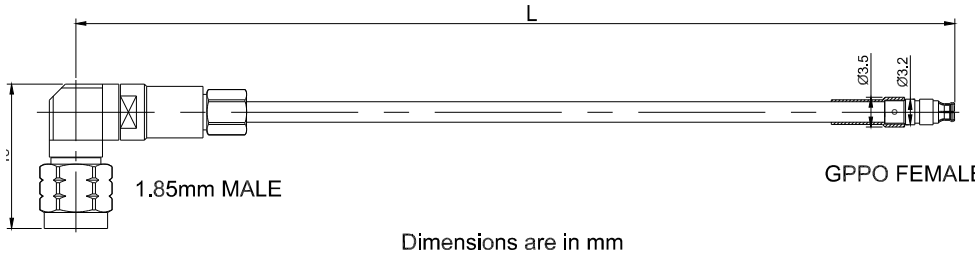

Product Configuration

Connector 1 Series	1.85mm
Connector 1 Polarity	Standard
Connector 1 Gender	Male
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	None
Connector 1 Body Style	Right Angle
Connector 2 Series	GPPO(Mini-SMP)
Connector 2 Polarity	Standard
Connector 2 Gender	Female
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	None
Connector 2 Body Style	Straight
Coax Cable	3506

Mechanical Data

Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Beryllium Copper
Connector 2 Body Plating	Gold
Out Diameter	2.2m'm
Min. Bending Radius	6mm

1.85mm Right Angle Male to GPPO Female Cable Using 3506 Series Low Loss Phase Stable Flexible Coax, DC-65GHz


P/N: FRU2-185WMGPPF-XXX

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +155°C
MIL/STD	N/A

Cable Specifications

Description	Parameter
Center Conductor	Silver plated copper wire
Dielectric	LD-PTFE
Inner Conductor	Silver-plated copper tape
Outer Conductor	Silver-plated copper braid
Jacket	FEP
Jacket Diameter(mm)	2.2
Capacitance(pF/m)	94
Velocity of propagation(%)	82
Min. bending radius(mm)	6
Shielding Effectiveness	> 90dB @ 1GHz

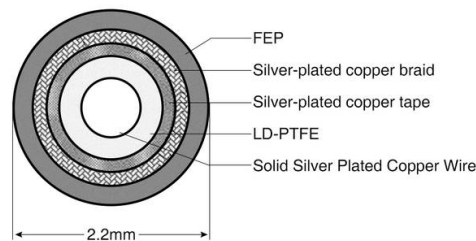

Part Number List

Part Number	Length(mm)	Frequency	Insertion Loss ≤ (dB)					Return Loss/VSWR
			10GHz	18GHz	26.5GHz	40GHz	67GHz	
FRU2-185WMGPPF-1500	1500±10	DC-65GHz	3.97	5.13	6.13	7.48	9.73	10dB
FRU2-185WMGPPF-1000	1000±10	DC-65GHz	2.92	3.69	4.36	5.26	6.76	10dB
FRU2-185WMGPPF-610	610±5	DC-65GHz	2.10	2.58	2.98	3.53	4.44	10dB
FRU2-185WMGPPF-500	500±5	DC-65GHz	1.87	2.26	2.59	3.04	3.79	10dB
FRU2-185WMGPPF-200	200±3	DC-65GHz	1.24	1.40	1.53	1.71	2.01	10dB
FRU2-185WMGPPF-150	150±3	DC-65GHz	1.14	1.26	1.34	1.49	1.72	10dB
FRU2-185WMGPPF-100	100±3	DC-65GHz	1.03	1.11	1.18	1.27	1.42	10dB

Note: Phase Matching is available by request.