


P/N: GAU2-24MGPPF-XXX

2.4mm Male to GPPO(Mini-SMP) Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | Cable Dia.2.2mm | DC - 50GHz

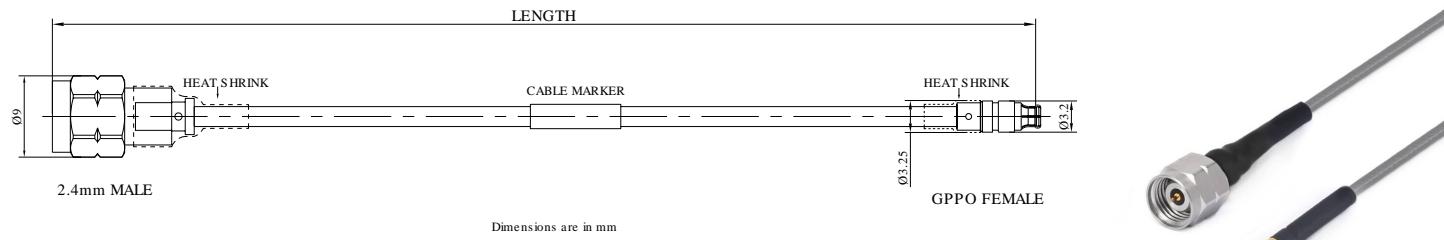


Connectors Configuration

| | Connector 1 | Connector 2 |
|---------------------------|-----------------|------------------|
| Connector Series | 2.4mm | GPPO(Mini-SMP) |
| Connector Polarity | Standard | Standard |
| Connector Gender | Male | Female |
| Connector Impedance (Ohm) | 50 | 50 |
| Connector Body Style | Straight | Straight |
| Connector Body Material | Stainless Steel | Beryllium Copper |
| Connector Body Plating | Passivated | Gold |

Cable Configuration

| | |
|--------------------------|----------------------------|
| Cable Type | GT3506 flexible cable |
| Cable Impedance (Ohm) | 50 |
| Inner Conductor Material | Silver Plated Copper Wire |
| Dielectric Material | LD-PTFE |
| Number of Shields | 2 |
| Shield Layer 1 Material | Silver Plated Copper Tape |
| Shield Layer 2 Material | Silver Plated Copper Braid |
| Jacket Material | FEP |
| Cable Diameter (mm) | 2.2 |
| Cable Color | Gray |
| Minimum Bend Radius (mm) | 11 |
| Capacitance (pF/m) | 94 |
| Velocity of Propagation | 82% |
| Shielding Effectiveness | < -100dB @ 1GHz |

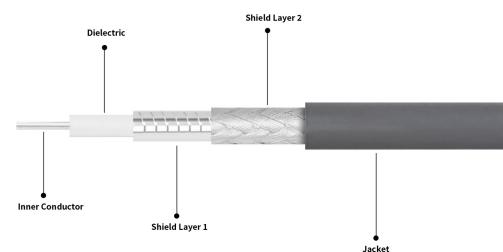

P/N: GAU2-24MGPPF-XXX

2.4mm Male to GPPO(Mini-SMP) Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | Cable Dia.2.2mm | DC - 50GHz

Electrical Data

Electrical Specifications for Different Length

| Length (mm) | Length Tolerance (mm) | Frequency | VSWR / Return Loss | Insertion Loss \leq (dB) |
|-------------|-----------------------|------------|--------------------|----------------------------|
| 100 | ± 3 | DC - 40GHz | 14dB to 40GHz | 1.12 to 40GHz |
| 200 | ± 3 | | | 1.54 to 40GHz |
| 300 | ± 5 | | | 2.06 to 40GHz |
| 500 | ± 5 | | | 2.98 to 40GHz |
| 800 | ± 10 | | | 4.42 to 40GHz |
| 1000 | ± 10 | | | 5.32 to 40GHz |
| 1500 | ± 15 | | | 7.52 to 40GHz |
| 2000 | ± 20 | | | 9.75 to 40GHz |

Environmental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-55 °C to +125 °C

Test Report for Cable assembly

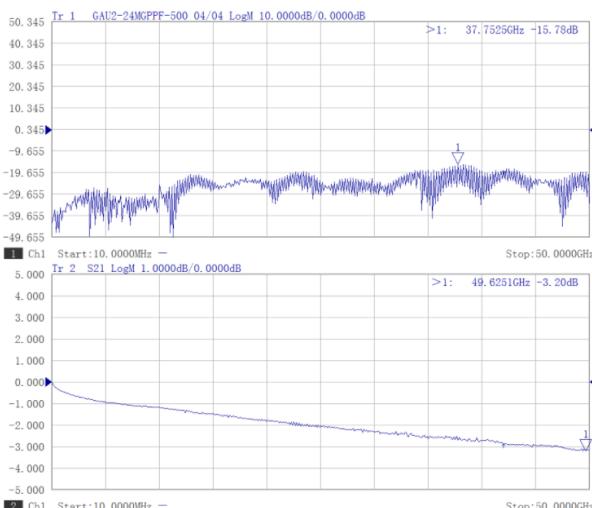

*Note: Test Cable Assembly Length = 500 mm

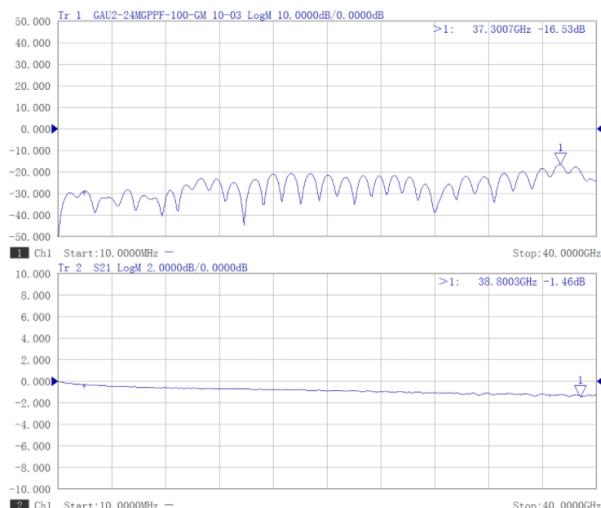

*Note: Test Cable Assembly Length = 100 mm