
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAU2-24MMMPXF-XXX

2.4mm Male to MMPX Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | Cable Dia.2.2mm | DC - 50GHz

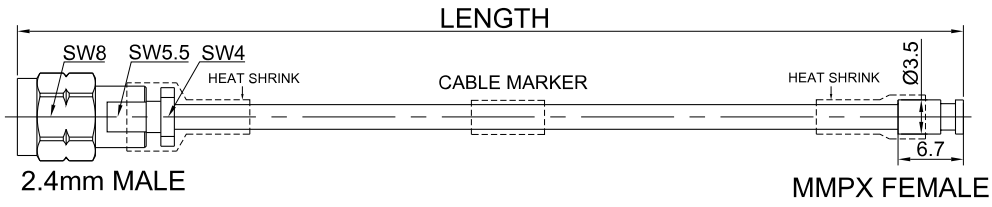

Dimensions are in mm




Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	MMPX
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	GT3506 flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	LD-PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.2
Cable Color	Gray
Minimum Bend Radius (mm)	11
Capacitance (pF/m)	94
Velocity of Propagation	82%
Shielding Effectiveness	< -100dB @ 1GHz

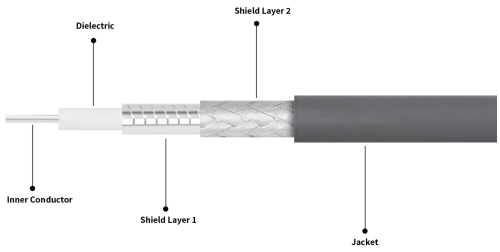

Gwave Technology Inc

(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAU2-24MMMPXF-XXX

2.4mm Male to MMPX Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | Cable Dia.2.2mm | DC - 50GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 50GHz	10dB to 50GHz	1.15 to 50GHz
200	±3			1.45 to 50GHz
300	±5			2.1 to 50GHz
500	±5			3.32 to 50GHz
800	±10			5.0 to 50GHz
1000	±10			5.78 to 50GHz
1500	±15			8.53 to 50GHz
2000	±20			10.94 to 50GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC