

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC - 40GHz	14dB to 40GHz	1.12 to 40GHz
200	± 3			1.54 to 40GHz
300	± 5			2.06 to 40GHz
500	± 5			2.98 to 40GHz
800	± 10			4.42 to 40GHz
1000	± 10			5.32 to 40GHz
1500	± 15			7.52 to 40GHz
2000	± 20			9.75 to 40GHz

Environmental Specifications


RoHS Compliant

Yes

Operating Temperature Range

-55 °C to +125 °C

Test Report for Cable assembly

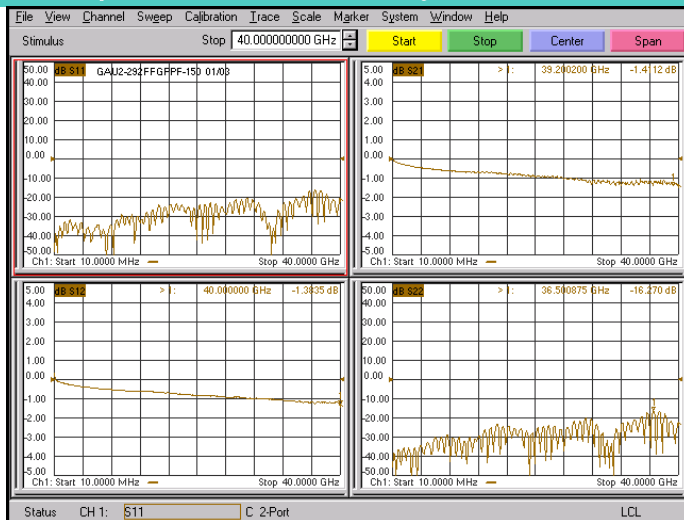

*Note: Test Cable Assembly Length = 150 mm

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01