

P/N: GAU2-292FFGPPF-XXX

2.92mm 4 Hole Flange Female to GPPO(Mini-SMP) Female Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	14dB to 40GHz	1.12 to 40GHz
200	±3			1.54 to 40GHz
300	±5			2.06 to 40GHz
500	±5			2.98 to 40GHz
800	±10			4.42 to 40GHz
1000	±10			5.32 to 40GHz
1500	±15			7.52 to 40GHz
2000	±20			9.75 to 40GHz

Environmental Specifications

RoHS Compliant
Yes
Operating Temperature Range
-55 °C to +125 °C

Test Report for Cable assembly

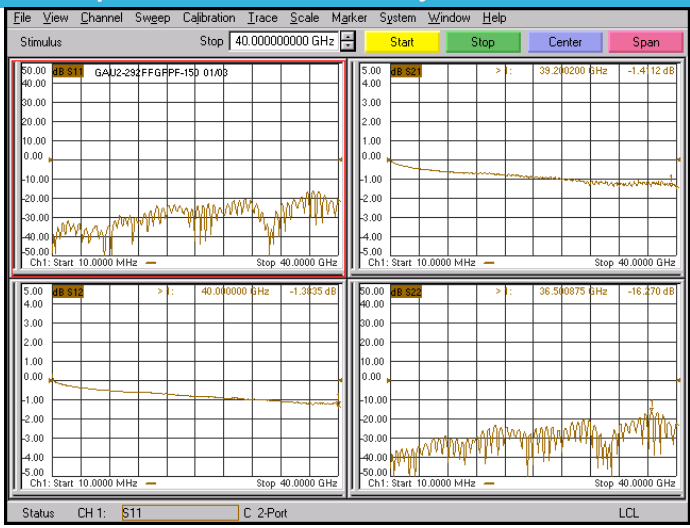

*Note: Test Cable Assembly Length = 150 mm