
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAU2-292WM292WM-XXX

2.92mm Right Angle Male to 2.92mm Right Angle Male Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz



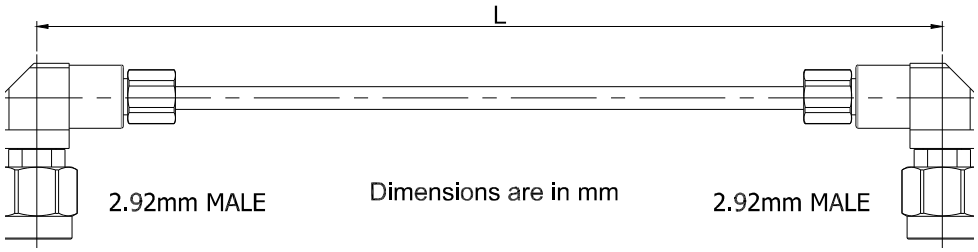


Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	2.92mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Type	GT3506 flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	LD-PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.2
Cable Color	Gray
Minimum Bend Radius (mm)	11
Capacitance (pF/m)	94
Velocity of Propagation	82%
Shielding Effectiveness	< -100dB @ 1GHz

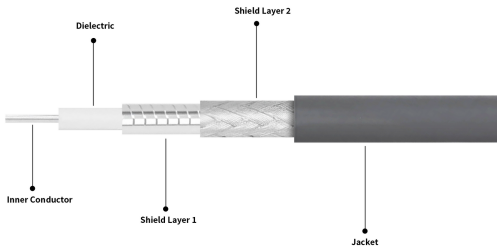

Gwave Technology Inc

(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAU2-292WM292WM-XXX

2.92mm Right Angle Male to 2.92mm Right Angle Male Cable Assembly | 3506 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	1.44	1.30 to 40GHz
150	±3			1.45 to 40GHz
200	±3			1.60 to 40GHz
250	±3			1.90 to 40GHz
300	±5			2.15 to 40GHz
400	±5			2.70 to 40GHz
500	±5			3.15 to 40GHz
800	±10			4.55 to 40GHz
1000	±10			5.40 to 40GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Test Report for Cable assembly

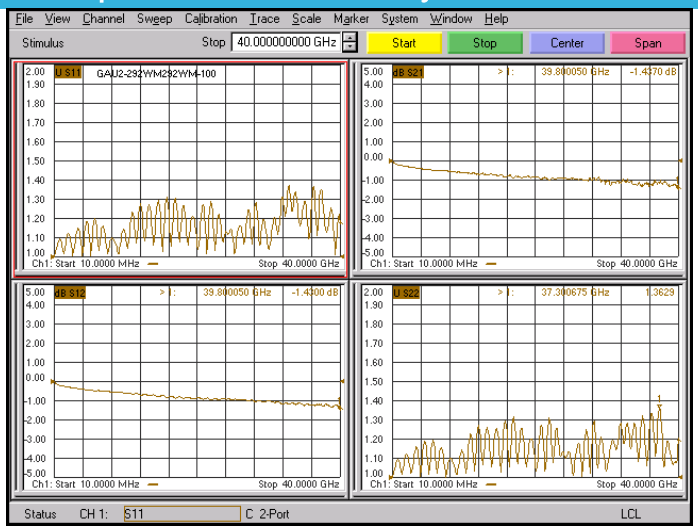

**Note:Test Cable Assembly Length = 100 mm*