


2.4mm NMD Female to 2.4mm Female Precision Flexible VNA Test Cable, DC - 50GHz P/N: **VNA-24F24F-630**

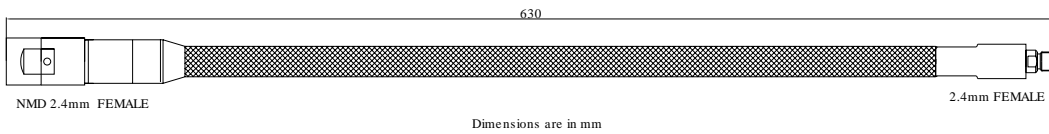

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm NMD	2.4mm
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

2.4mm NMD Female to 2.4mm Female Precision Flexible VNA Test Cable, DC - 50GHz P/N: VNA-24F24F-630

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A

Test Report for Cable assembly

