


2.4mm NMD Female to 2.4mm NMD Male Precision Flexible VNA Test Cable, DC - 50GHz

P/N: VNA-24F24M-630

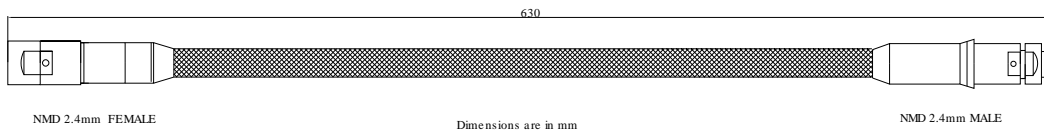

Product Configuration

| | |
|-----------------------------|-----------|
| Connector 1 Series | 2.4mm NMD |
| Connector 1 Polarity | Standard |
| Connector 1 Gender | Female |
| Connector 1 Impedance (Ohm) | 50 |
| Connector 1 Mount Method | None |
| Connector 1 Body Style | Straight |
| Connector 2 Series | 2.4mm NMD |
| Connector 2 Polarity | Standard |
| Connector 2 Gender | Male |
| Connector 2 Impedance (Ohm) | 50 |
| Connector 2 Mount Method | None |
| Connector 2 Body Style | Straight |
| Coax Flex Type | Flexible |

Mechanical Data

| | |
|---------------------------|-----------------|
| Connector 1 Body Material | Stainless Steel |
| Connector 1 Body Plating | Passivated |
| Connector 2 Body Material | Stainless Steel |
| Connector 2 Body Plating | Passivated |
| Out Diameter | 15.2mm |
| Min. Bending Radius | 50mm |
| Mating Cycles, Min | ≥5000 |
| Weight (g) | 329 g |

2.4mm NMD Female to 2.4mm NMD Male Precision Flexible VNA Test Cable, DC - 50GHz

P/N: VNA-24F24M-630

Environmental Specifications

| | |
|-----------------------------|----------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | 0 °C to +40 °C |
| MIL/STD | N/A |

Cable Specifications

| Description | Parameter |
|-------------------------|----------------------------|
| Center Conductor | Silver plated copper wire |
| Dielectric | ePTFE |
| Inner Conductor | Silver-plated copper tape |
| Outer Conductor | Silver-plated copper braid |
| Jacket | FEP |
| Armor Type | Multilayer Armor |
| Diameter(mm) | 15.2 |
| Mating Cycles | >2000 |
| Min. bending radius(mm) | 50 |

