


2.4mm Male to 2.4mm Male Cable Assembly | 3507 Series Low Loss
P/N: FRU3-24M24M-XXX

Phase Stable Flexible Coax Cable | DC - 40GHz

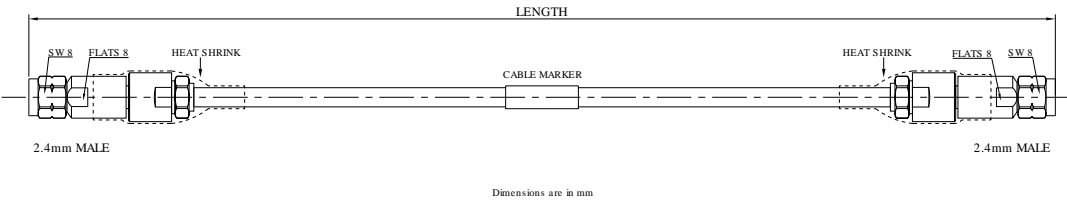

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	2.4mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Diameter (mm)	3.6
---------------------	-----


2.4mm Male to 2.4mm Male Cable Assembly | 3507 Series Low Loss P/N: FRU3-24M24M-XXX Phase Stable Flexible Coax Cable | DC - 40GHz

Electrical Data


Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

Test Report for Cable assembly

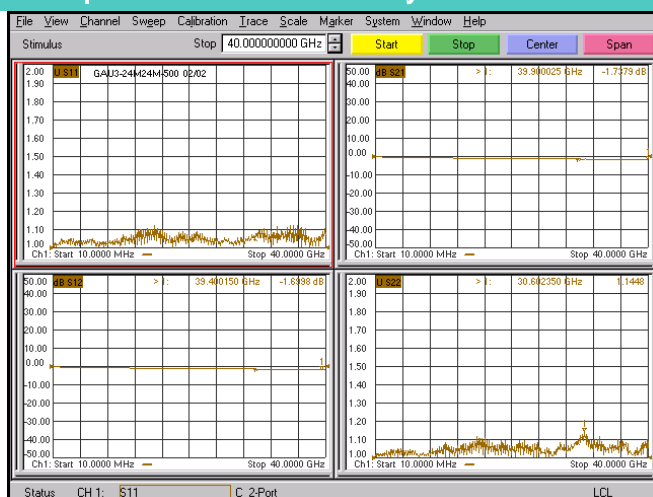

*Note: Test Cable Assembly Length = 500 mm

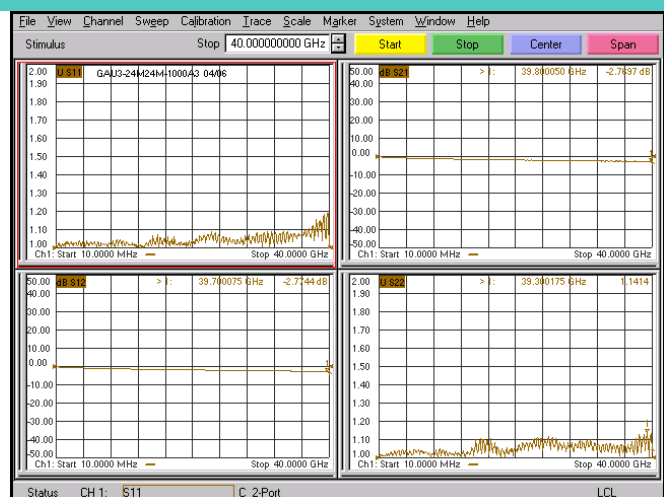

*Note: Test Cable Assembly Length = 1000 mm