


## 2.92mm NMD Female to 2.92mm Female Precision Flexible VNA Test Cable, DC - 40GHz

P/N: VNA-292F292F-630



### Connectors Configuration


	Connector 1	Connector 2
Connector Series	2.92mm NMD	2.92mm
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

# 2.92mm NMD Female to 2.92mm Female Precision Flexible VNA Test Cable, DC - 40GHz

P/N: VNA-292F292F-630

## Electrical Data

## Test Report for Cable assembly

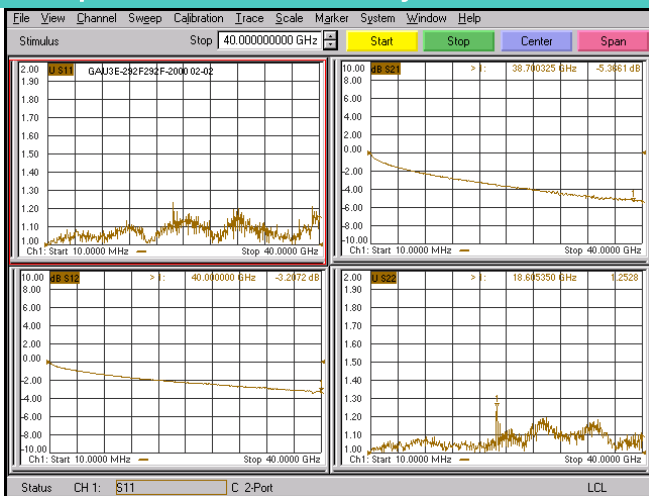

\*Note: Test Cable Assembly Length = 2000 mm

## Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

0 °C to +40 °C

MIL/STD

N/A