


2.92mm NMD Female to 2.92mm NMD Male Precision Flexible VNA P/N: VNA-292F292M-630
Test Cable, DC - 40GHz

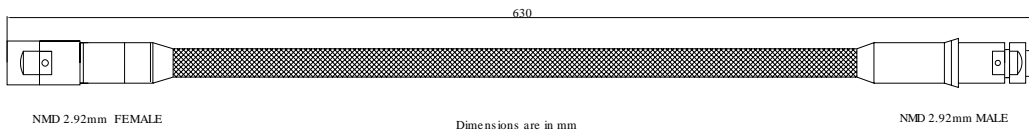

Connectors Configuration

| | Connector 1 | Connector 2 |
|---------------------------|-----------------|-----------------|
| Connector Series | 2.92mm NMD | 2.92mm NMD |
| Connector Polarity | Standard | Standard |
| Connector Gender | Female | Male |
| Connector Impedance (Ohm) | 50 | 50 |
| Connector Mount Method | None | None |
| Connector Body Style | Straight | Straight |
| Connector Body Material | Stainless Steel | Stainless Steel |
| Connector Body Plating | Passivated | Passivated |

2.92mm NMD Female to 2.92mm NMD Male Precision Flexible VNA P/N: [VNA-292F292M-630](#)
Test Cable, DC - 40GHz

Electrical Data

Environmental Specifications

| | |
|-----------------------------|----------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | 0 °C to +40 °C |
| MIL/STD | N/A |