


2.92mm NMD Female to 2.92mm NMD Male Precision Flexible VNA Test Cable, DC - 40GHz

P/N: VNA-292F292M-630

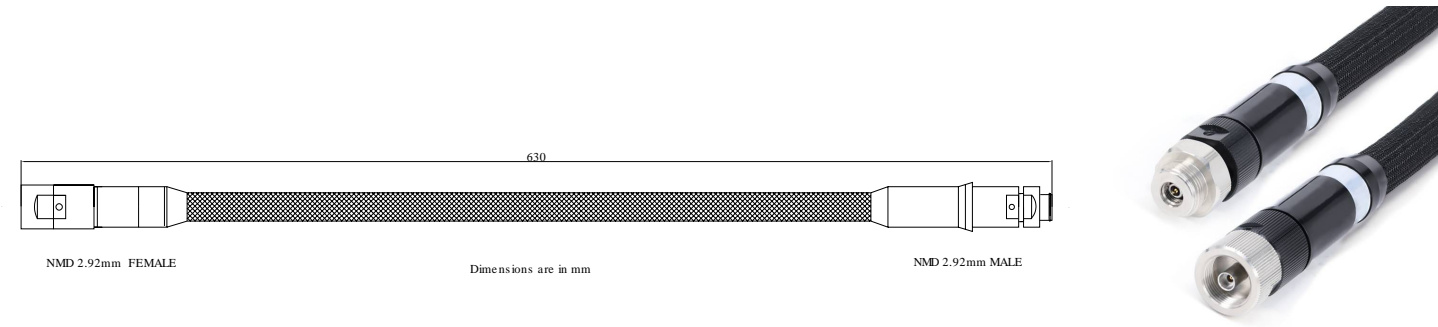

Connectors Configuration		
	Connector 1	Connector 2
Connector Series	2.92mm NMD	2.92mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

2.92mm NMD Female to 2.92mm NMD Male Precision Flexible VNA [P/N: VNA-292F292M-630](#)  
Test Cable, DC - 40GHz

Electrical Data

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A