


2.92mm Male to 2.4mm Male Cable Assembly | 3507 Series Low
Loss Phase Stable Flexible Coax Cable | DC - 40GHz

P/N: FRU3-292M24M-XXX

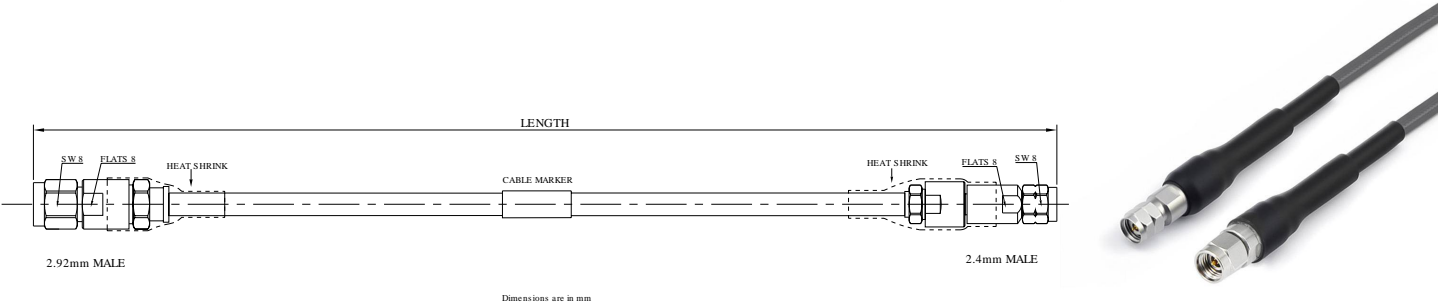

Connectors Configuration		
	Connector 1	Connector 2
Connector Series	2.92mm	2.4mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration	
Cable Diameter (mm)	3.6

2.92mm Male to 2.4mm Male Cable Assembly | 3507 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz


P/N: FRU3-292M24M-XXX

Electrical Data


Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

Test Report for Cable assembly

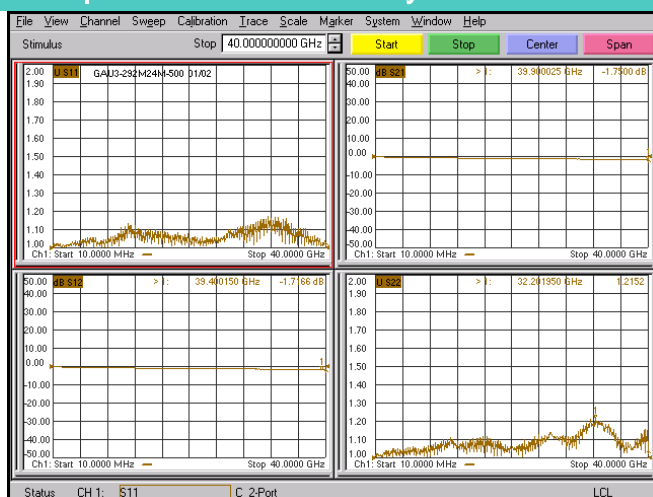

*Note: Test Cable Assembly Length = 500 mm

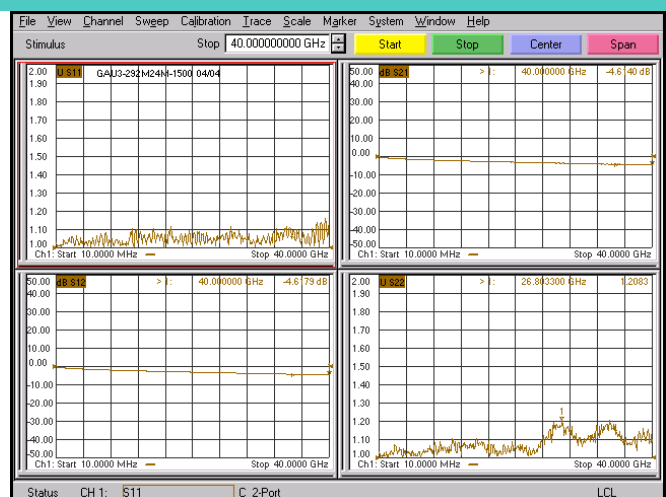

*Note: Test Cable Assembly Length = 1500 mm