


2.92mm Male to 2.92mm Male Cable Using 3507 Series Low Loss  
Phase Stable Flexible Coax, DC - 40GHz

P/N: FRU3-292M292M-XXX

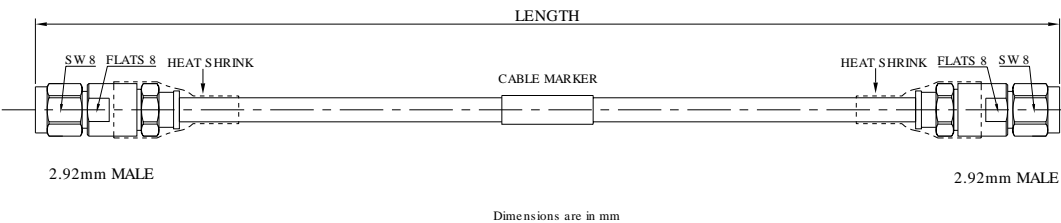


Connectors Configuration		
	Connector 1	Connector 2
Connector Series	2.92mm	2.92mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

2.92mm Male to 2.92mm Male Cable Using 3507 Series Low Loss  
Phase Stable Flexible Coax, DC - 40GHz


P/N: FRU3-292M292M-XXX

Electrical Data

Test Report for Cable assembly

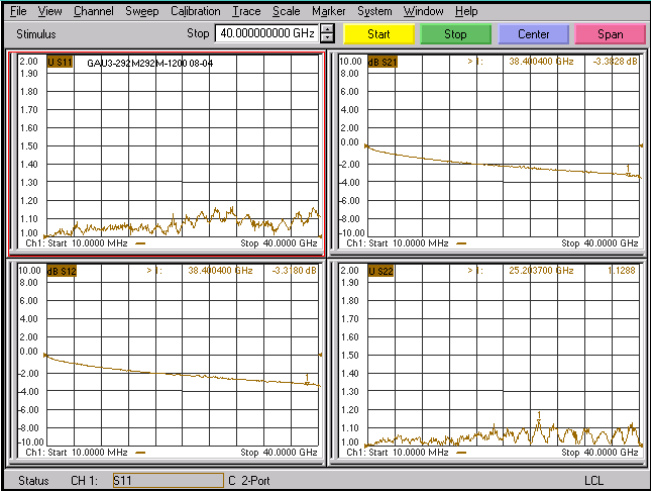

\*Note:Test Cable Assembly Length = 1200 mm

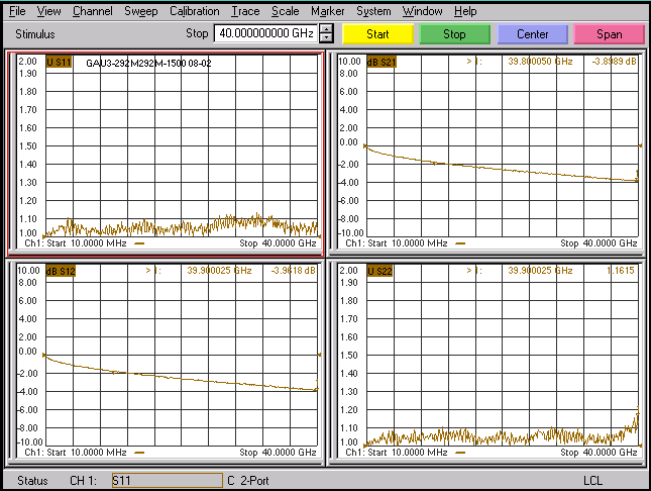

\*Note:Test Cable Assembly Length = 1500 mm

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A