


**2.92mm Male to 2.92mm Male Cable Assembly | 3507 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz**      **P/N: FRU3-292M292M-XXX**

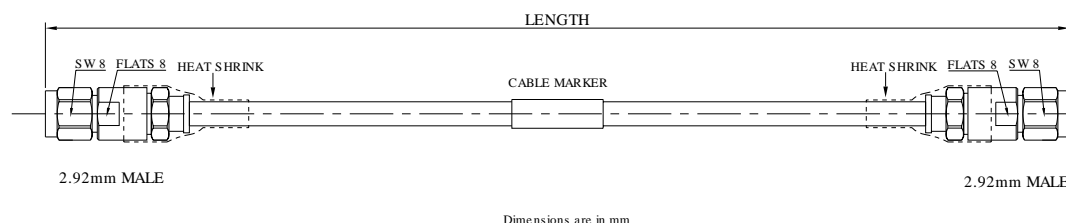

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	2.92mm
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

## Cable Configuration

Cable Diameter (mm)	3.6
---------------------	-----

## 2.92mm Male to 2.92mm Male Cable Assembly | 3507 Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz


P/N: FRU3-292M292M-XXX

### Electrical Data


### Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

### Test Report for Cable assembly

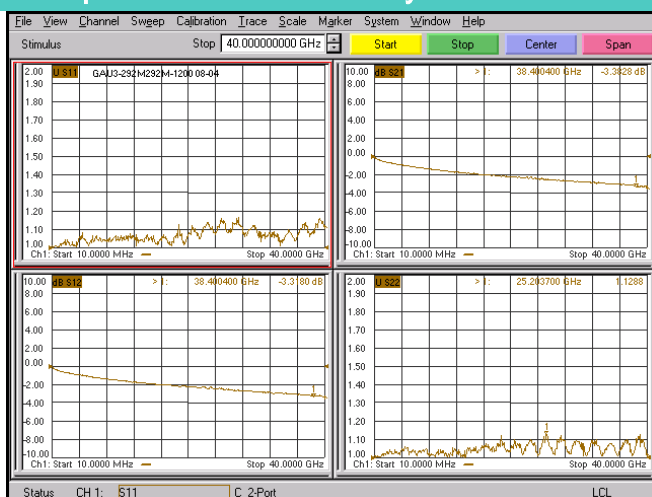

\*Note: Test Cable Assembly Length = 1200 mm

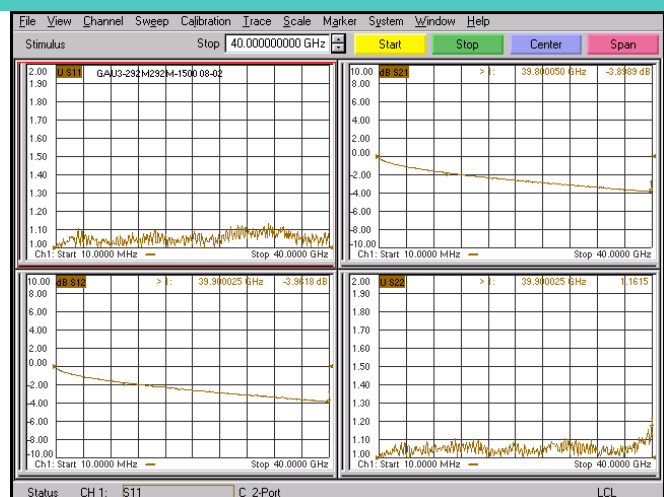

\*Note: Test Cable Assembly Length = 1500 mm