


**3.5mm NMD Female to 3.5mm NMD Male Precision Flexible VNA Test Cable, DC - 26.5GHz**

**P/N: VNA-35F35M-630**

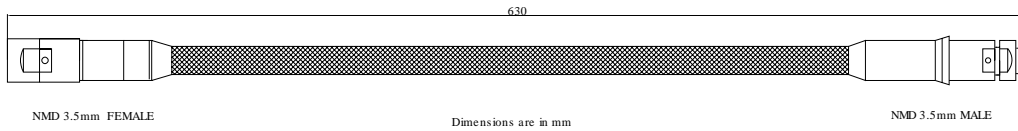

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	3.5mm NMD	3.5mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

3.5mm NMD Female to 3.5mm NMD Male Precision Flexible VNA  
Test Cable, DC - 26.5GHz

P/N: [VNA-35F35M-630](#)

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A