


## Circulator with 15dB Isolation from 1GHz to 2GHz, 30 Watts and SMA Female

P/N: GCN010020-30W-SMF



Dimensions are in mm

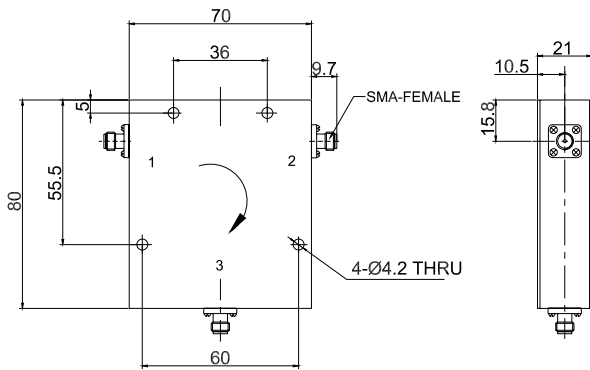

### Electrical Performance Parameter Table

#### Product Configuration

Connector 1 Series	SMA
Connector 2 Series	SMA
Connector 1 Polarity	Standard
Connector 2 Polarity	Standard
Connector 1 Gender	Female
Connector 2 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 2 Impedance (Ohm)	50

## Circulator with 15dB Isolation from 1GHz to 2GHz, 30 Watts and SMA Female

P/N: GCN010020-30W-SMF

### Mechanical Data

Connector 1 Body Material	Brass
Connector 1 Body Plating	Gold
Connector 2 Body Material	Brass
Connector 2 Body Plating	Gold
Weight (g)	425
Body Material	Aluminum
Body Plating	Oxidation

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0°C to +60 °C
Storage Temperature Range	-40 °C to +85 °C

### Test Data

