


Circulator with 15dB Isolation from 2GHz to 6GHz, 20 Watts with SMA Female

P/N: GCN020060-20W-SMF

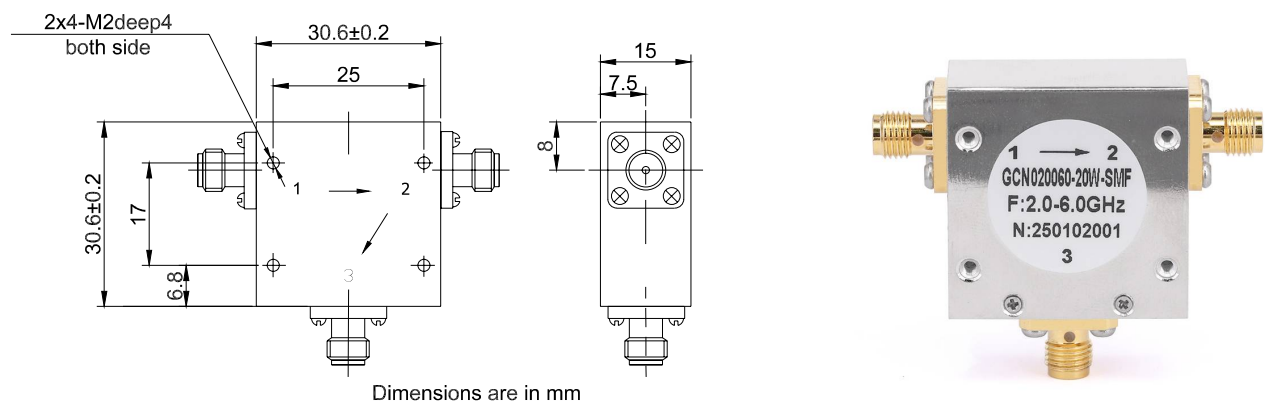

Product Configuration

Connector 1 Series	SMA
Connector 2 Series	SMA
Connector 1 Polarity	Standard
Connector 2 Polarity	Standard
Connector 1 Gender	Female
Connector 2 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 2 Impedance (Ohm)	50

Mechanical Data

Connector 1 Body Material	Brass
Connector 1 Body Plating	Gold
Connector 2 Body Material	Brass
Connector 2 Body Plating	Gold
Weight (g)	64
Body Material	Aluminum
Body Plating	Oxidation
External body material	Nickel plated iron

Circulator with 15dB Isolation from 2GHz to 6GHz, 20 Watts with SMA Female

P/N: GCN020060-20W-SMF

Electrical Specifications

VSWR	≤1.45
Insertion Loss	≤0.7dB
Power, Max Input (Watts)	20
Frequency Range	2GHz~6GHz
Isolation Min.(dB)	15
Direction	Clockwise:1□2□3

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0°C to +60 °C
Storage Temperature Range	-40 °C to +85 °C

Test Data

