


Circulator with 13.8dB Isolation from 26.5GHz to 40GHz | 5Watts with 2.92mm Female

P/N: GCN265400-5W-292F



Dimensions are in mm

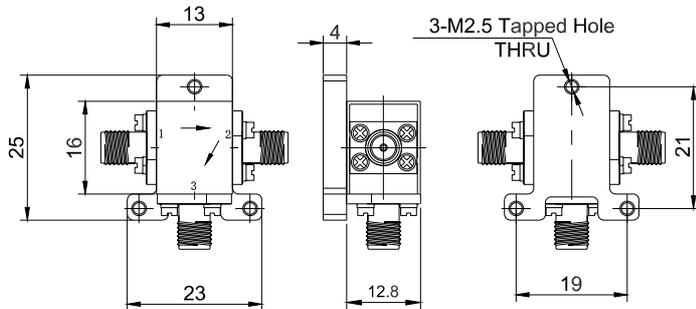

Product Configuration

Connector 1 Series	2.92mm
Connector 2 Series	2.92mm
Connector 1 Polarity	Standard
Connector 2 Polarity	Standard
Connector 1 Gender	Female
Connector 2 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 2 Impedance (Ohm)	50

Mechanical Data

Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Stainless Steel
Connector 2 Body Plating	Passivated
Weight (g)	31
Body Material	Brass
Body Plating	Nickel
External body material	Nickel plated iron

Circulator with 13.8dB Isolation from 26.5GHz to 40GHz | 5Watts with 2.92mm Female

P/N: GCN265400-5W-292F

Electrical Specifications

VSWR / Return Loss	≤1.65
Insertion Loss	≤ 1.4dB
Power, Max Input (Watts)	5
Frequency Range	26.5GHz~40GHz
Isolation Min.(dB)	14
Direction	Clockwise:1→2→3

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C+85°C
Storage Temperature Range	-40 °C to +85 °C

Test Data

