


## SMA Male to SMA Female Adjustable Phase Trimmer, 360 Degrees Phase Range, DC - 18GHz

P/N: GDL22-T50



Dimensions are in mm

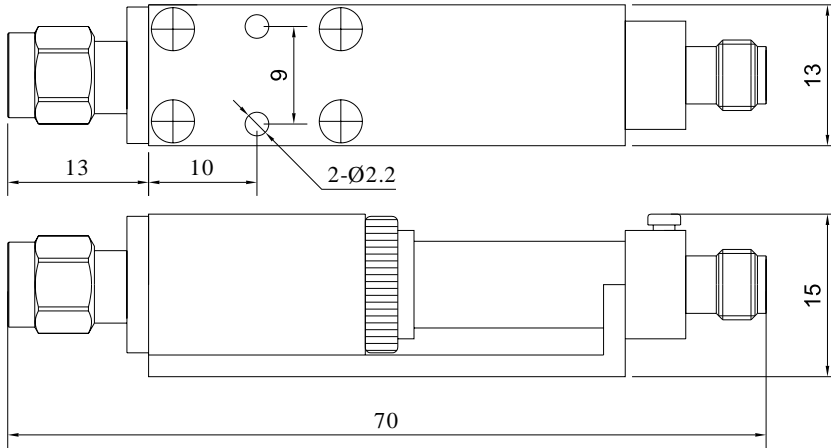

### Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Male
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Frequency	DC-18GHz
VSWR	1.6
Insertion Loss	≤1.5
Adjustable Phase	360°

**SMA Male to SMA Female Adjustable Phase Trimmer, 360 Degrees  
Phase Range, DC - 18GHz**

**P/N: GDL22-T50**

## Mechanical Data

Weight (g)	50.3 g
Body Material	Brass
Body Plating	Gold

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C