


**SMA Male to SMA Female Adjustable Phase Trimmer | 360 Degrees
Phase Range | DC - 18GHz**

P/N: GDL22-T50



Dimensions are in mm

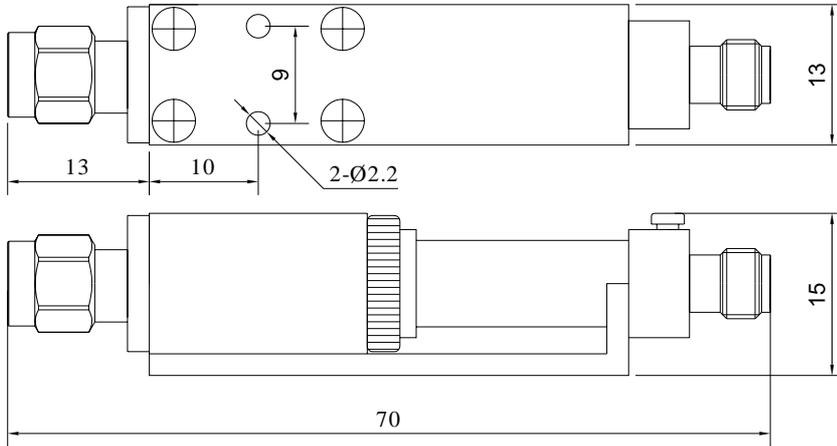

Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Male
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.6
Insertion Loss	≤ 1.5dB
Adjustable Phase	360°

**SMA Male to SMA Female Adjustable Phase Trimmer | 360 Degrees
Phase Range | DC - 18GHz**

P/N: GDL22-T50

Mechanical Data

Weight (g)	50.3 g
Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C