


WR-28 Rectangular Waveguide Standard Gain Horn Antenna 25 dBi P/N: [GHA26.5G40G-WR28-25](#)
 Typical Gain | Ka Band 26.5 to 40GHz

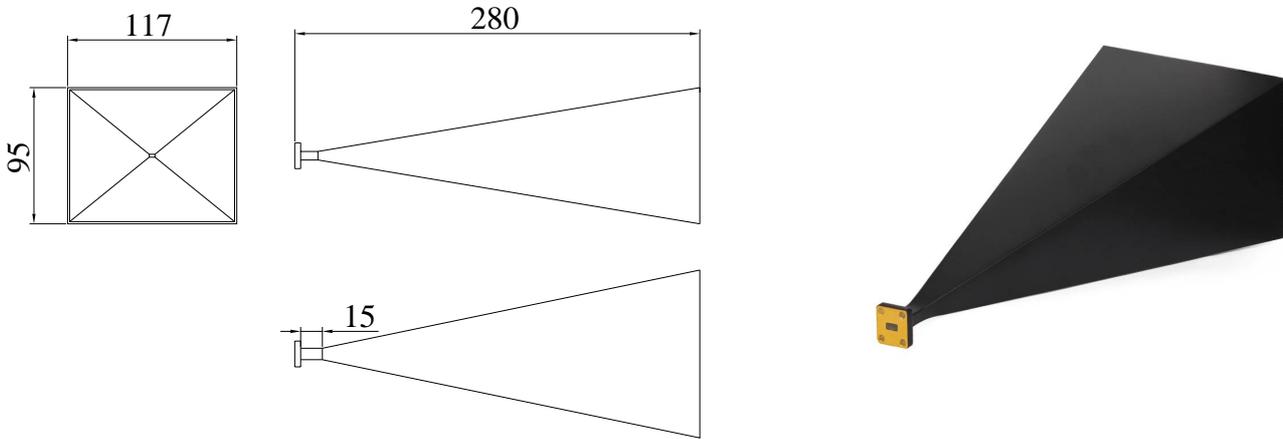

Dimensions are in mm

Product Configuration

| | |
|---------------------------|----------|
| Connector Series | WR28 |
| Connector Polarity | Standard |
| Connector Impedance (Ohm) | 50 |
| Antenna Type | Horn |
| Flange Designation | FBP320 |

Mechanical Data

| | |
|---------------|-------|
| Body Material | Brass |
| Colour | Black |

Electrical Specifications

| | |
|---------------------------|-----------------|
| Return Loss or VSWR Input | 1.3 |
| Polarization | Linear |
| Number of Bands | Wide |
| Gain, Typical (dBi) | 25 |
| Frequency Range | 26.5GHz - 40GHz |

Environmental Specifications

| | |
|-----------------------------|------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -45 °C to +85 °C |

WR-28 Rectangular Waveguide Standard Gain Horn Antenna 25 dBi [P/N: GHA26.5G40G-WR28-25](#)
Typical Gain | Ka Band 26.5 to 40GHz