


Isolator with 16dB Isolation from 1GHz to 2GHz, 30 Watts and SMA Female

P/N: GIS010020-SMF



Dimensions are in mm

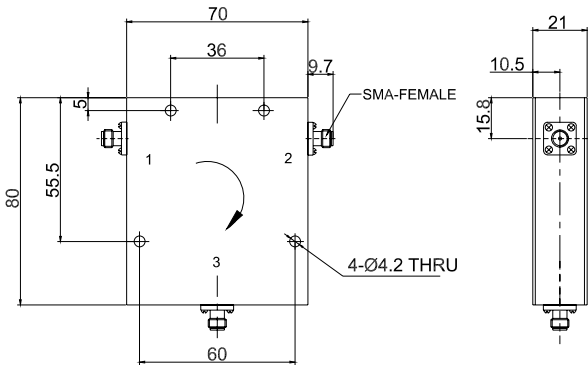

Electrical Performance Parameter Table

Product Configuration

Connector-In Series	SMA
Connector-Out Series	SMA
Connector-In Polarity	Standard
Connector-Out Polarity	Standard
Connector-In Gender	Female
Connector-Out Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Impedance (Ohm)	50

Isolator with 16dB Isolation from 1GHz to 2GHz, 30 Watts and SMA Female

P/N: GIS010020-SMF

Mechanical Data

Weight (g)	416
Body Material	Aluminum
Body Plating	Oxidation
Connector In Body Material	Brass
Connector In Body Plating	Gold
Connector Out Body Material	Brass
Connector Out Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0°C to +60 °C
Storage Temperature Range	-40 °C to +85 °C

Test Data

