


Isolator with 13.8dB Isolation from 26.5GHz to 40GHz, 5Watts and 2.92mm Female

P/N: GIS265400-292F



Dimensions are in mm

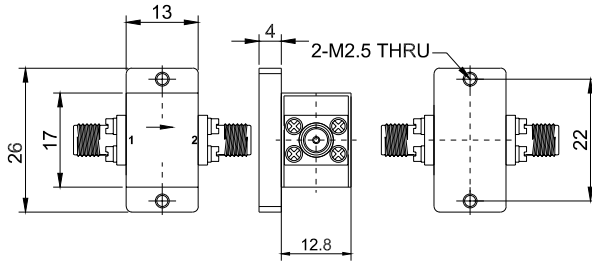

## Electrical Performance Parameter Table

### Product Configuration

Connector-In Series	2.92mm
Connector-Out Series	2.92mm
Connector-In Polarity	Standard
Connector-Out Polarity	Standard
Connector-In Gender	Female
Connector-Out Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Impedance (Ohm)	50

## Isolator with 13.8dB Isolation from 26.5GHz to 40GHz, 5Watts and 2.92mm Female

P/N: GIS265400-292F

### Mechanical Data

Weight (g)	31
Body Material	Aluminum
Body Plating	Oxidation
Connector In Body Material	Stainless Steel
Connector In Body Plating	Passivated
Connector Out Body Material	Stainless Steel
Connector Out Body Plating	Passivated

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C+85°C
Storage Temperature Range	-55 °C to +85 °C

### Test Data

