
# 2-Way SMA Power Divider From 0.5 GHz to 8 GHz Rated at 20 Watts

P/N: GPD-2-005080-E




Dimensions are in mm

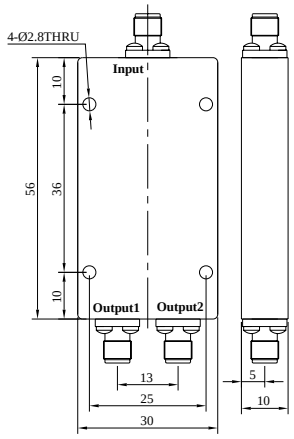

## Product Configuration

| | |
|---|---|
| Connector-In Series | SMA |
| Connector-In Polarity | Standard |
| Connector-In Gender | Female |
| Connector-In Impedance (Ohm) | 50 |
| Connector-Out Series | SMA |
| Connector-Out Polarity | Standard |
| Connector-Out Gender | Female |
| Connector-Out Impedance (Ohm) | 50 |

## Electrical Specifications

| | |
|---|---|
| Insertion Loss | ≤ 1dB |
| Power, Max Input (Watts) | 20 |
| Return Loss or VSWR Input | 1.4 |
| Frequency Range | 0.5-8GHz |
| Return Loss or VSWR Output | 1.2 |
| Amplitude Balance (dB) | ±0.2 |
| Phase Balance (°) | ±3 |
| Isolation Min.(dB) | 18 |

## Mechanical Data

| | |
|---|---|
| Min. Mating Cycles | ≥500 |
| Weight (g) | 44 g |
| Colour | Black |
| Housing Material | Aluminum |

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com

## 2-Way SMA Power Divider From 0.5 GHz to 8 GHz Rated at 20 Watts

P/N: GPD-2-005080-E

## Enviromental Specifications

| | |
|---|---|
| RoHS Compliant | Yes |
| Operating Temperature Range | -45 ºC to +85 ºC |

## Test Data

