
Datasheet

2-Way 2.92mm Power Divider From 18 GHz to 40 GHz Rated at 20 Watts P/N: GPD-2-180400-E



Dimensions are in mm

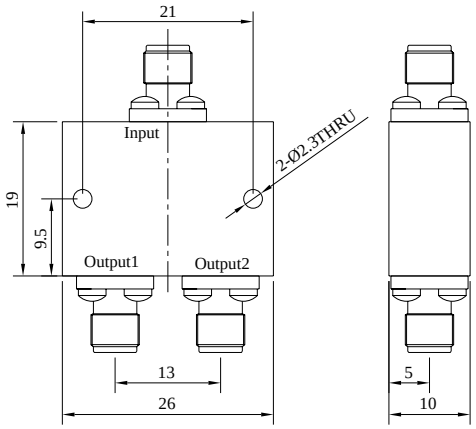

Product Configuration

Connector-In Series	2.92mm
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	2.92mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

Electrical Specifications

Insertion Loss	≤ 1dB
Power, Max Input (Watts)	20
Return Loss or VSWR Input	1.5
Frequency Range	18-40GHz
Return Loss or VSWR Output	1.5
Amplitude Balance (dB)	±0.4
Phase Balance (°)	±5
Isolation Min.(dB)	16

Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	20.8 g
Colour	Black
Housing Material	Aluminum

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com


www.gwavetech.com

2-Way 2.92mm Power Divider From 18 GHz to 40 GHz Rated at 20 Watts P/N: GPD-2-180400-E


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45 ºC to +85 ºC

Test Data

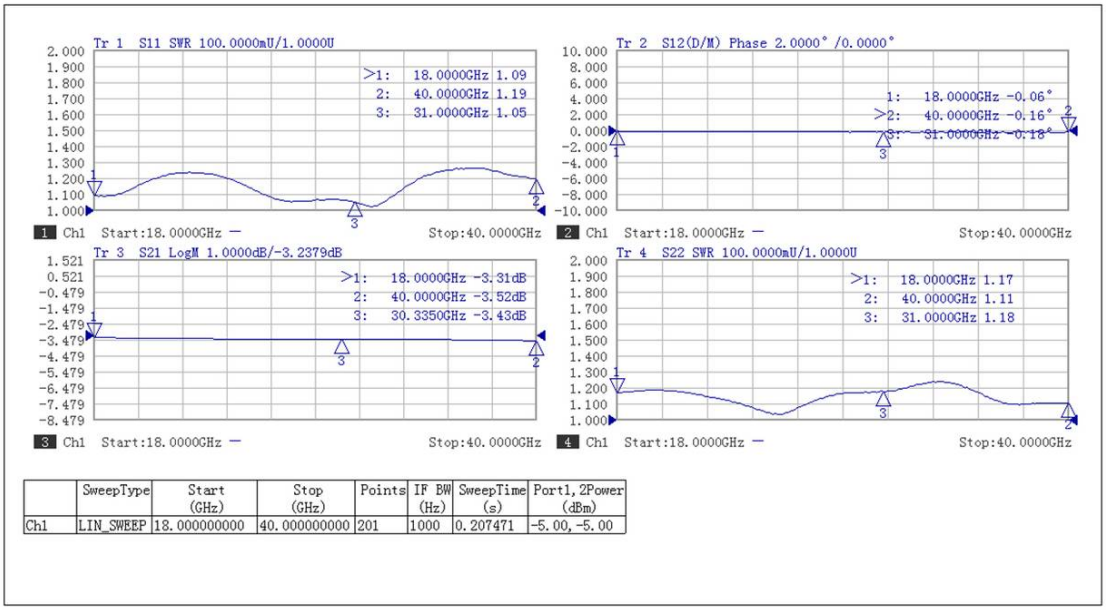

	SweepType	Start (GHz)	Stop (GHz)	Points	IF BW (Hz)	SweepTime (s)	Port1, 2Power (dBm)
Ch1	LIN_SWEEP	18.000000000	40.000000000	201	1000	0.207471	-5.00, -5.00

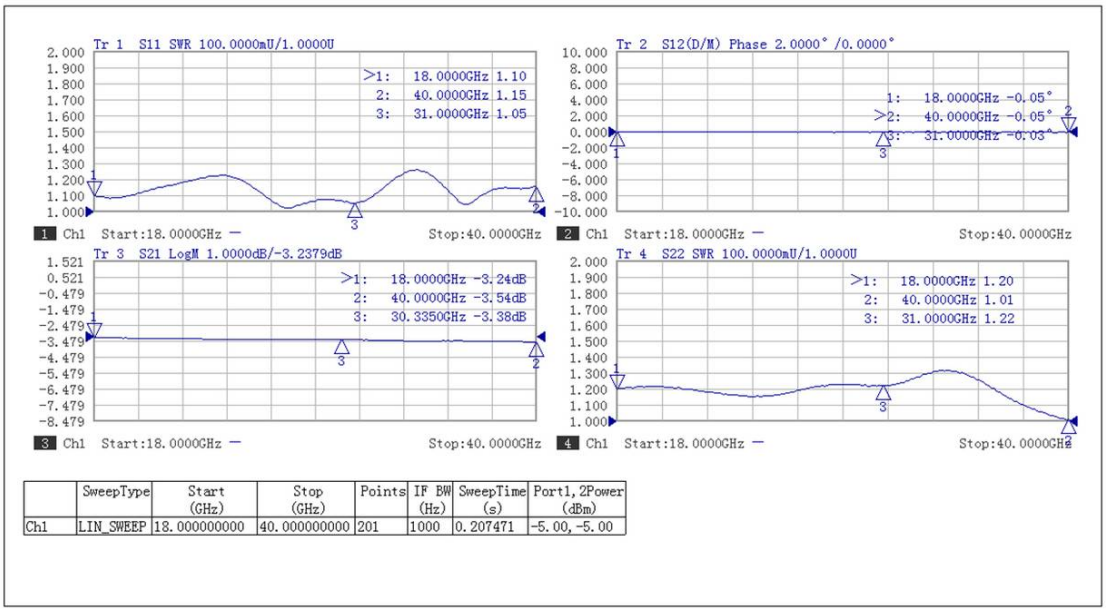

	SweepType	Start (GHz)	Stop (GHz)	Points	IF BW (Hz)	SweepTime (s)	Port1, 2Power (dBm)
Ch1	LIN_SWEEP	18.000000000	40.000000000	201	1000	0.207471	-5.00, -5.00

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com