


## 6-Way SMA Power Divider From 0.5 GHz to 6 GHz Rated at 30 Watts

P/N: GPD-6-005060-E

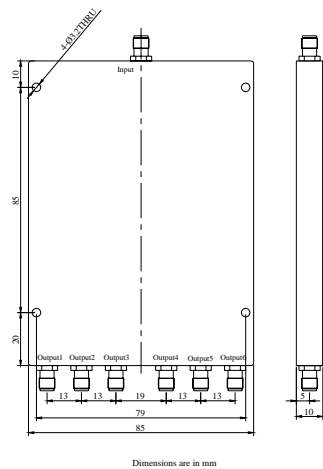

### Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Insertion Loss	≤2.2
Power, Max Input (Watts)	30
VSWR, Max Input	1.3
Frequency Range	0.5-6GHz
VSWR, Max Output	1.3
Amplitude Balance (dB)	±0.8
Phase Balance (°)	±8
Isolation Min.(dB)	18

### Mechanical Data

Mating Cycles, Min	≥500
Colour	Black
Housing Material	Aluminum

## 6-Way SMA Power Divider From 0.5 GHz to 6 GHz Rated at 30 Watts

P/N: GPD-6-005060-E

### Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-35 °C to +75 °C

### Test Data

