


**SMP (GPO) Male RF Termination Load | 40GHz, 0.5W, 50 Ohm |
4.8mm Diameter Microwave Coaxial Dummy Load**

P/N: GPO-J-03



Dimensions are in mm

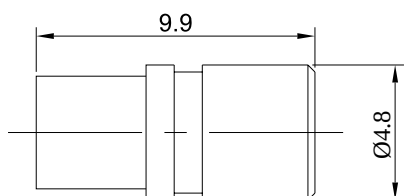

Product Configuration

Connector Series	GPO(SMP)
Connector Polarity	Standard
Connector Gender	Male
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.4
Power, Max Input (Watts)	0.5

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C

Test Report

