
Flexi RF
Reliable RF Components In Stock

Datasheet

GPO (SMP) Male Vertical Launch Solderless PCB Connector with 2 Hole Flange for Stripline | DC - 40GHz | Limited Detent

P/N: FR2-GPO-JFD216-1



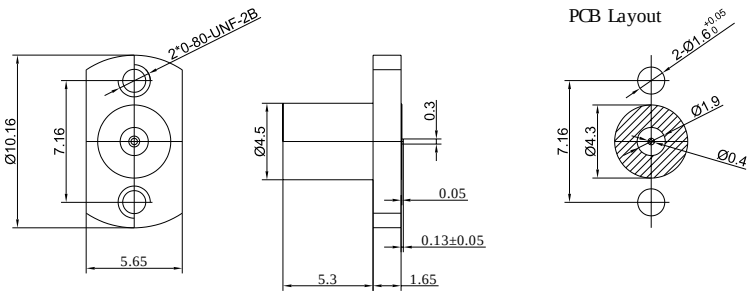

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	GPO(SMP)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.5
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Weight	0.79 g
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com