


GPO (SMP) Male Full Detent Connector with 2 Hole Flange | DC - 26.5GHz

GPO-JFD246-F



Dimensions are in mm

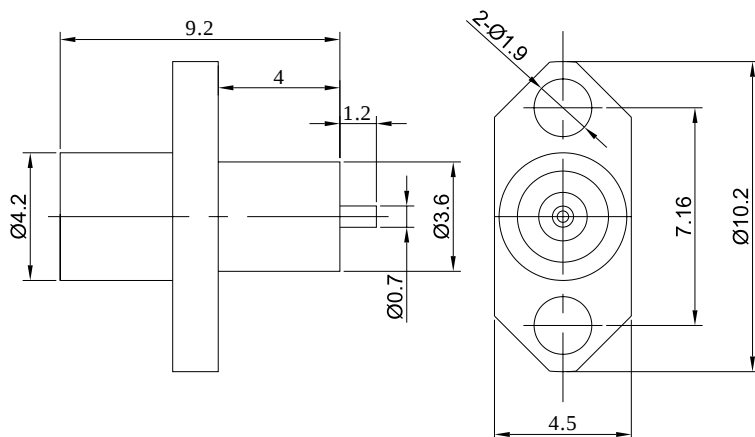

Product Configuration

Connector Series	GPO(SMP)
Connector Polarity	Standard
Connector Gender	Male
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	0.8 g
Body Material	Brass
Body Plating	Gold

Electrical Specifications

Frequency	DC - 26.5GHz
VSWR / Return Loss	1.43
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A