


## GPO (SMP) Male Smooth Connector PCB Mount Soldering, DC - 26.5GHz

P/N: FR2-GPO-JHD2-S

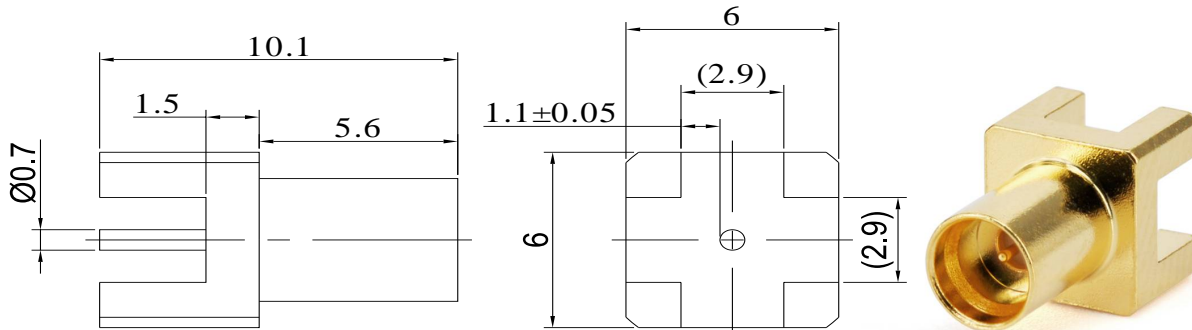

Dimensions are in mm

### Product Configuration

Body Style	Straight
Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

### Electrical Specifications

Frequency	DC-26.5GHz
VSWR	1.43
Insertion Loss	≤0.05 xSqt.(f_GHz)

### Mechanical Data

Mating Cycles, Min	≥500
Weight	1.03 g
Body Material	Brass
Body Plating	Gold

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A