
Flexi RF
Reliable RF Components In Stock

Datasheet

GPO(SMP) Female to GPO(SMP) Female Adapter | 0.04 GHz to 18 GHz | Length 25.6mm

P/N: FR1-GPO-KK244

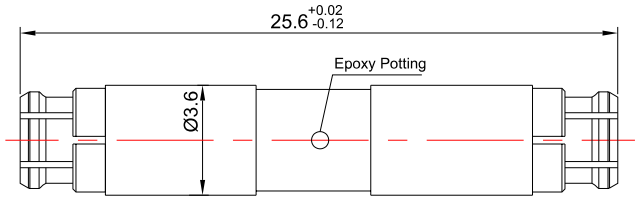

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	GPO(SMP)	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	CuBe	CuBe
Connector Body Plating	Gold	Gold

Electrical Specifications

Frequency	0.04GHz to 18GHz
VSWR / Return Loss	16dB to 18GHz
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)


Mechanical Data

Min. Mating Cycles	≥500

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +125°C

Test Report

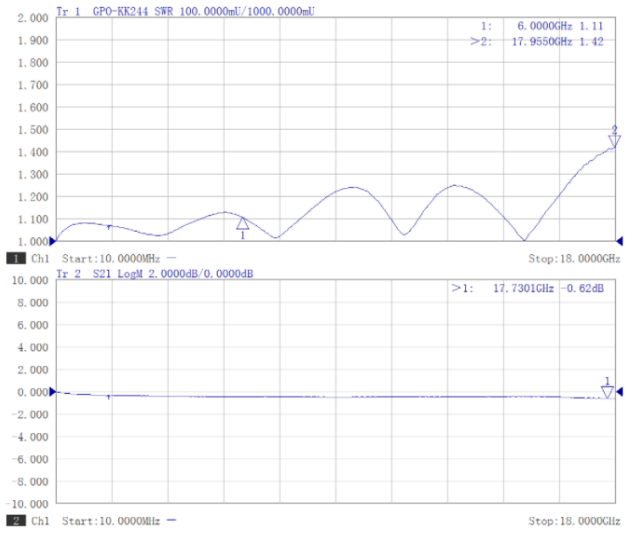

Flexi RF Inc

(650)880-9199

20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014

sales@flexirf.com

www.flexirf.com