
Datasheet

GPPO(mini-SMP) Male 4 Channel Connector End Launch | PCB Mount DC-40GHz

GPPO-J4MHD



Dimensions are in mm

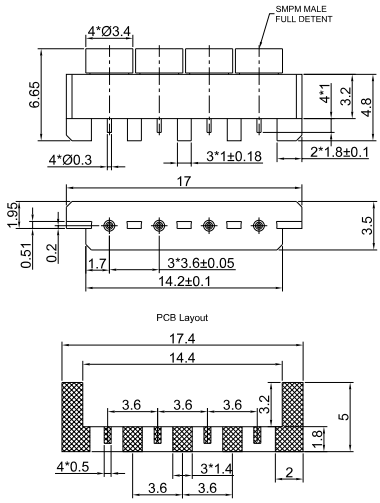

Product Configuration

Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Male
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	1.4 @40GHz;1.65 @67GHz;
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +85°C

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com