
Flexi RF
Reliable RF Components In Stock

Datasheet

GPPO(mini-SMP) Male 4 Channel Connector | End Launch | PCB Mount | DC-40GHz

P/N: FR2-GPPO-J4MHD

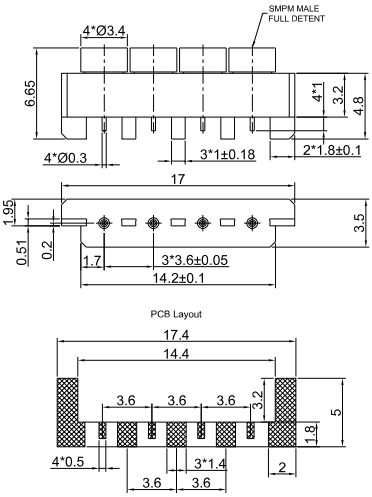

Dimensions are in mm



Product Configuration

Body Style	Straight
Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	1.4 @40GHz;1.65 @67GHz;
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +85°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com