
Flexi RF
Reliable RF Components In Stock

Datasheet

GPPO (Mini-SMP) Male Smooth Bore Connector PCB Mount Soldering | DC - 40GHz | Smooth Bore

P/N: FR2-GPPO-JHD-S

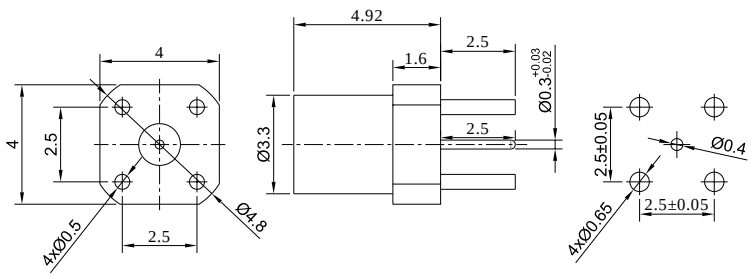

Dimensions are in mm



Product Configuration

Body Style	Straight
Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.5
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Weight	0.4 g
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com