


GPPO(Mini-SMP) Male to GPPO(Mini-SMP) Male Pierce through a wall Straight Precision Adapter | DC to 65GHz

P/N: FR1-GPPO-JJS



Dimensions are in mm

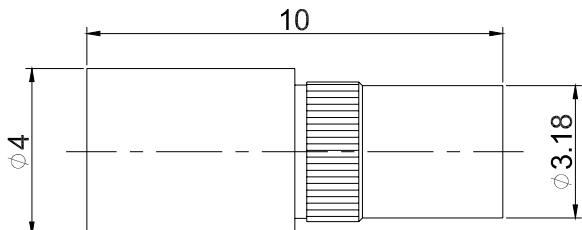

Product Configuration

	Connector 1	Connector 2
Connector Series	GPPO(Mini-SMP)	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Electrical Specifications

Frequency	DC - 65GHz
VSWR / Return Loss	1.35
Insertion Loss	$\leq 0.1 \times \text{Sqrt.}(f \text{ GHz})$

Mechanical Data

Min. Mating Cycles >500

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45°C to +125°C