


**GPPO(Mini-SMP) Female RF Load Termination Up To 40 GHz, 0.5 Watts, Gold Plated Beryllium Copper**

**P/N: FR3-GPPO-K-03-3**

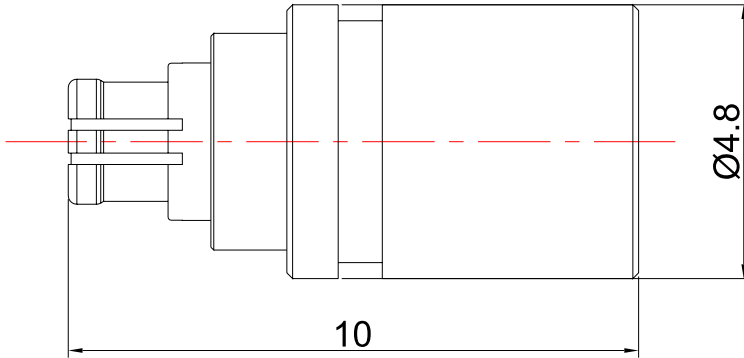

Dimensions are in mm

## Product Configuration

Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

## Electrical Specifications

Frequency	DC- 40GHz
VSWR	1.2
Power, Max Input (Watts)	0.5

## Mechanical Data

Min. Mating Cycles	≥500
Weight	0.73 g
Body Material	Beryllium Copper
Body Plating	Gold
Cryogenic	No
Non-Magnetic	No

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C
MIL/STD	N/A