
Datasheet

GPPO(Mini-SMP) Female RF Load Termination Up To 40 GHz | 1 Watts | Gold Plated Beryllium Copper

P/N: GPPO-K-03-4



Dimensions are in mm

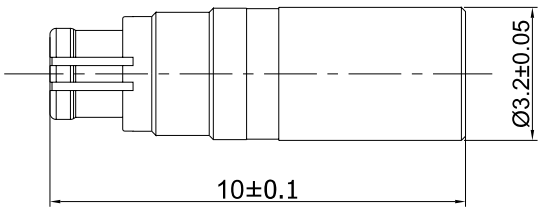

Product Configuration

Connector Series	GPPO(Mini-SMP)
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC -40GHz
VSWR / Return Loss	1.2 to 18GHz, 1.4 to 40GHz
Power, Max Input (Watts)	1

Mechanical Data


Min. Mating Cycles	≥500
Body Material	Beryllium Copper
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC
MIL/STD	N/A

Test Report



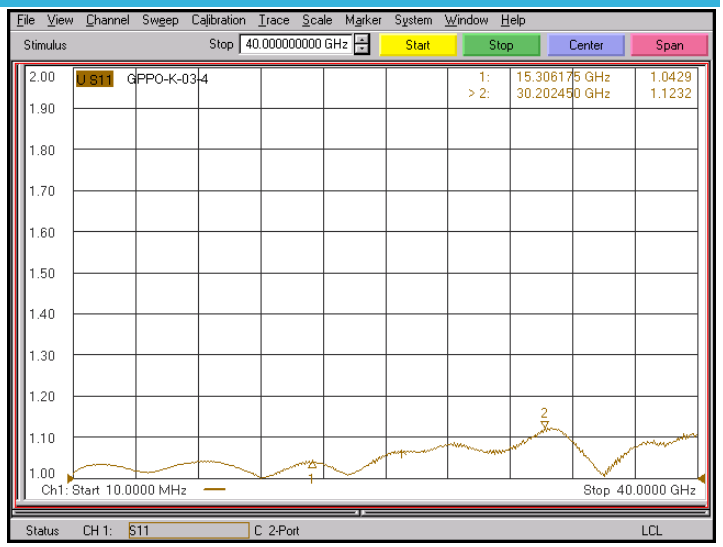

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com