


SPDT Electromechanical Relay Failsafe Switch, TTL, SMA Female, DC - 18GHZ, 24V P/N: GSP2T2418TTL

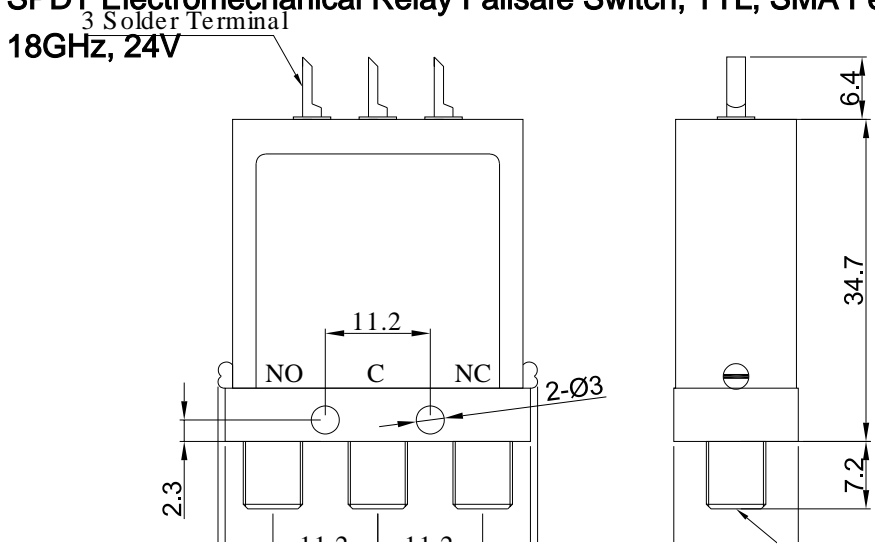

Product Configuration

Control Interface	Solder Pin
Switch Type	Terminated

Mechanical Data

Mating Cycles, Min	≥500
Weight (g)	40.3 g

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-25°C to +60°C