



## 2.92 Female Low Noise Amplifier (LNA), 15dB Gain, 3.5dB Noise Figure, 18GHz - 40GHz

P/N: **GWLNA018040-15**

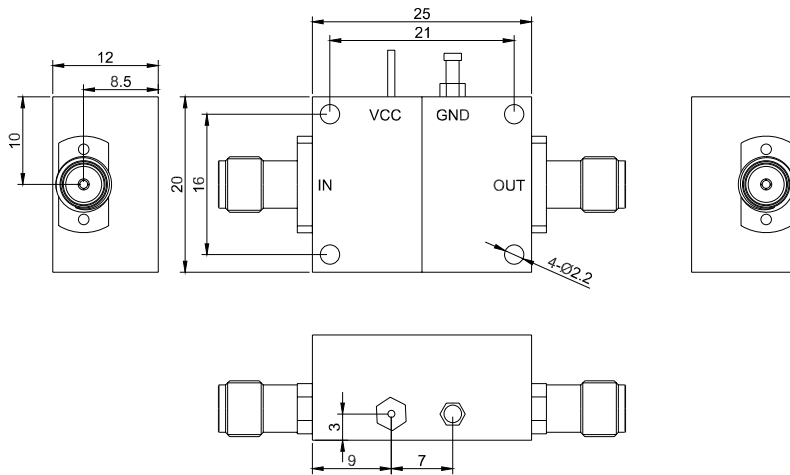

Dimensions are in mm



### Product Configuration

Connector-In Series	2.92mm
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	2.92mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Frequency Range	18GHz to 40GHz
VSWR, Max Input	1.8
VSWR, Max Output	2.2
Gain, Typical (dB)	15
Gain Flatness (dB)	±2.5
P-1dB (dBm)	15
Noise Figure, Max (dB)	3.5
3rd Intercept Point (dB)	25
Voltage, DC Typ (Volts)	+12
Voltage, DC Max (Volts)	+12
Current, Max (mA)	120

Flexi RF Inc

☎ (650)880-9199

📍 3070 Scott Blvd, Santa Clara, CA 95054-3325

✉ sales@flexirf.com

🌐 www.flexirf.com

— Max Input Power (dBm)

0

—

**2.92 Female Low Noise Amplifier (LNA), 15dB Gain, 3.5dB Noise Figure, 18GHz - 40GHz**

**P/N: [GWLNA018040-15](#)**

## Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Nickel

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +70 °C
Storage Temperature Range	-40 °C to +85 °C