
Datasheet

MMPX Male RF Load Up To 40 GHz | 1 Watt

P/N: MMPX-J-03-40G-1W



Dimensions are in mm

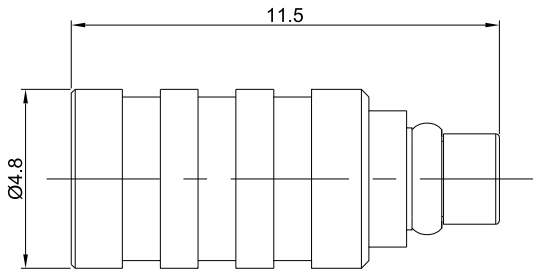

Product Configuration

Connector Series	MMPX
Connector Polarity	Standard
Connector Gender	Male
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.45
Power, Max Input (Watts)	1

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +85°C

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com