

Datasheet

MMPX Female PCB Jack Connector, 50 Ohm, Straight, SMT Signal & Through-Hole Ground MMPX-KHD2

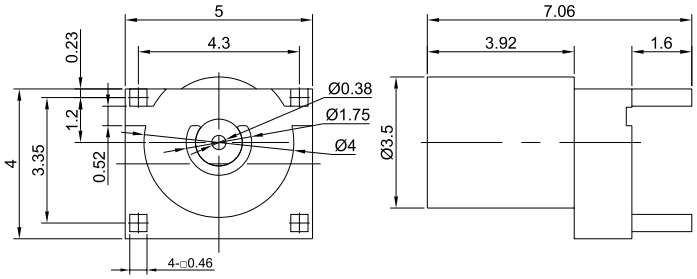

Dimensions are in mm

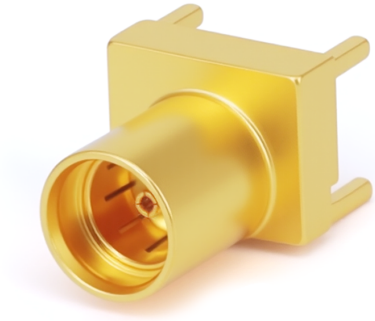

Product Configuration

Connector Series	MMPX
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Coax
Connector Impedance (Ohm)	50
Mount Method	End Launch

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	15dB to 67GHz
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +125°C

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com