


## N Female to 2.92mm Female Adapter | DC - 18GHz

## FR1-N/2.92-KKS-A

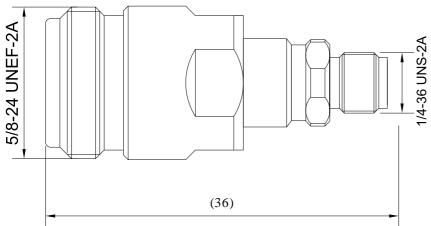

Dimensions are in mm

Product Configuration	
Connector 1 Series	Ν
Connector 1 Polarity	Standard
Connector 1 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	None
Connector 2 Series	2.92mm
Connector 2 Polarity	Standard
Connector 2 Gender	Female
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	None

Mechanical Data	
Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Stainless Steel

Connector 2 Body Plating

Min. Mating Cycles

Weight

Passivated ≥500 27.4 g

	0	
<b>Hectrica</b>	Specificat	inne
	opcomoa	

Frequency VSWR / Return Loss Insertion Loss

Body Style

DC-18GHz 1.09 ≤0.1 xSqt.(f\_GHz)

Straight

## **Enviromental Specifications**

RoHS Compliant	Yes
Operating Temperature	-55 °C to +165 °C
Range	
MIL/STD	N/A

- ③ 3070 Scott Blvd, Santa Clara, CA 95054-3325
- sales@flexirf.com
- (e) www.flexirf.com