


Datasheet

N Female to SMA Female Adapter with 4 Hole Flange | DC - 18GHz

N/SMA-KFKS



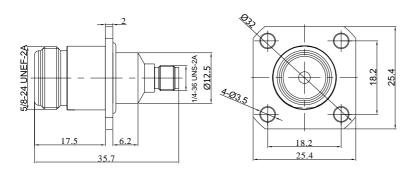

Dimensions are in mm

Product Configuration

Connector 1 Series N

Connector 1 Polarity Standard
Connector 1 Gender Female
Connector 1 Impedance (Ohm) 50

Connector 1 Mount Method 4 Hole Flange

Connector 2 Series SMA

Connector 2 Polarity Standard

Connector 2 Gender Female

Connector 2 Impedance (Ohm) 50

Connector 2 Mount Method 4 Hole Flange

Mechanical Data

Connector 1 Body Material Stainless Steel
Connector 1 Body Plating Passivated
Connector 2 Body Material Stainless Steel
Connector 2 Body Plating Passivated
Min. Mating Cycles ≥500
Weight (g) 41.8 g

Electrical Specifications

Frequency DC-18GHz

VSWR / Return Loss 1.15

Insertion Loss ≤0.1 xSqt.(f_GHz)

Enviromental Specifications

RoHS Compliant Yes

Operating Temperature -55 °C to +165 °C

Range

MIL/STD N/A