


## N Female to TNC Female Straight Adapter | DC-3GHz

P/N: N/TNC-KK



Dimensions are in mm

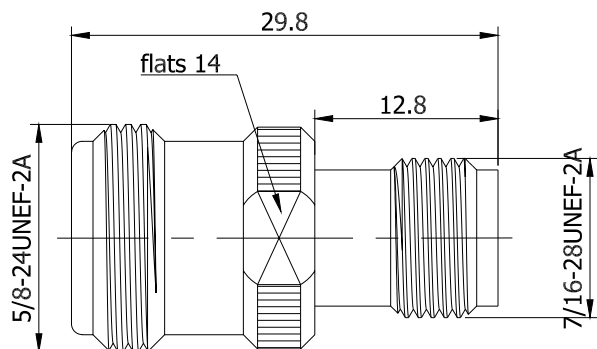

### Product Configuration

|                           | Connector 1 | Connector 2 |
|---------------------------|-------------|-------------|
| Connector Series          | N           | TNC         |
| Connector Polarity        | Standard    | Standard    |
| Connector Gender          | Female      | Female      |
| Connector Impedance (Ohm) | 50          | 50          |
| Connector Body Material   | Brass       | Brass       |
| Connector Body Plating    | Nickel      | Nickel      |
| Body Style                | Straight    | Straight    |
| Mount Method              |             | None        |

### Electrical Specifications

|                    |                                        |
|--------------------|----------------------------------------|
| Frequency          | DC - 3GHz                              |
| VSWR / Return Loss | 1.30                                   |
| Insertion Loss     | $\leq 0.1 \times \text{Sqrt.}(f\_GHz)$ |

### Mechanical Data

|                    |            |
|--------------------|------------|
| Min. Mating Cycles | $\geq 500$ |
| Weight (g)         | 29 g       |

### Environmental Specifications

|                             |                   |
|-----------------------------|-------------------|
| RoHS Compliant              | Yes               |
| Operating Temperature Range | -55 °C to +165 °C |