


N Female RF Load Termination Up To 18 GHz | 2 Watts | Passivated Stainless Steel

P/N: FR3-N-K-03S



Dimensions are in mm

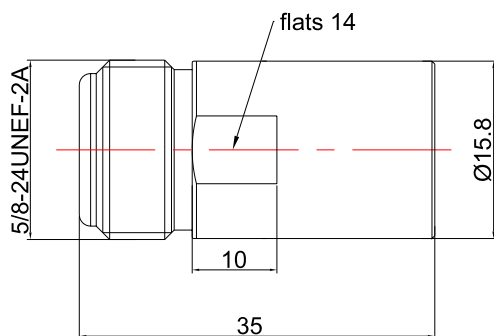

Product Configuration

| | |
|---------------------------|----------|
| Connector Series | N |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Connector Impedance (Ohm) | 50 |

Electrical Specifications

| | |
|--------------------------|-----------|
| Frequency | DC -18GHz |
| VSWR / Return Loss | 1.15 |
| Power, Max Input (Watts) | 2 |

Mechanical Data

| | |
|--------------------|-----------------|
| Min. Mating Cycles | ≥500 |
| Weight | 39.8 g |
| Body Material | Stainless Steel |
| Body Plating | Passivated |

Environmental Specifications

| | |
|-----------------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 °C to +125 °C |
| MIL/STD | N/A |

Test Report

